


Solar Pump Inverter

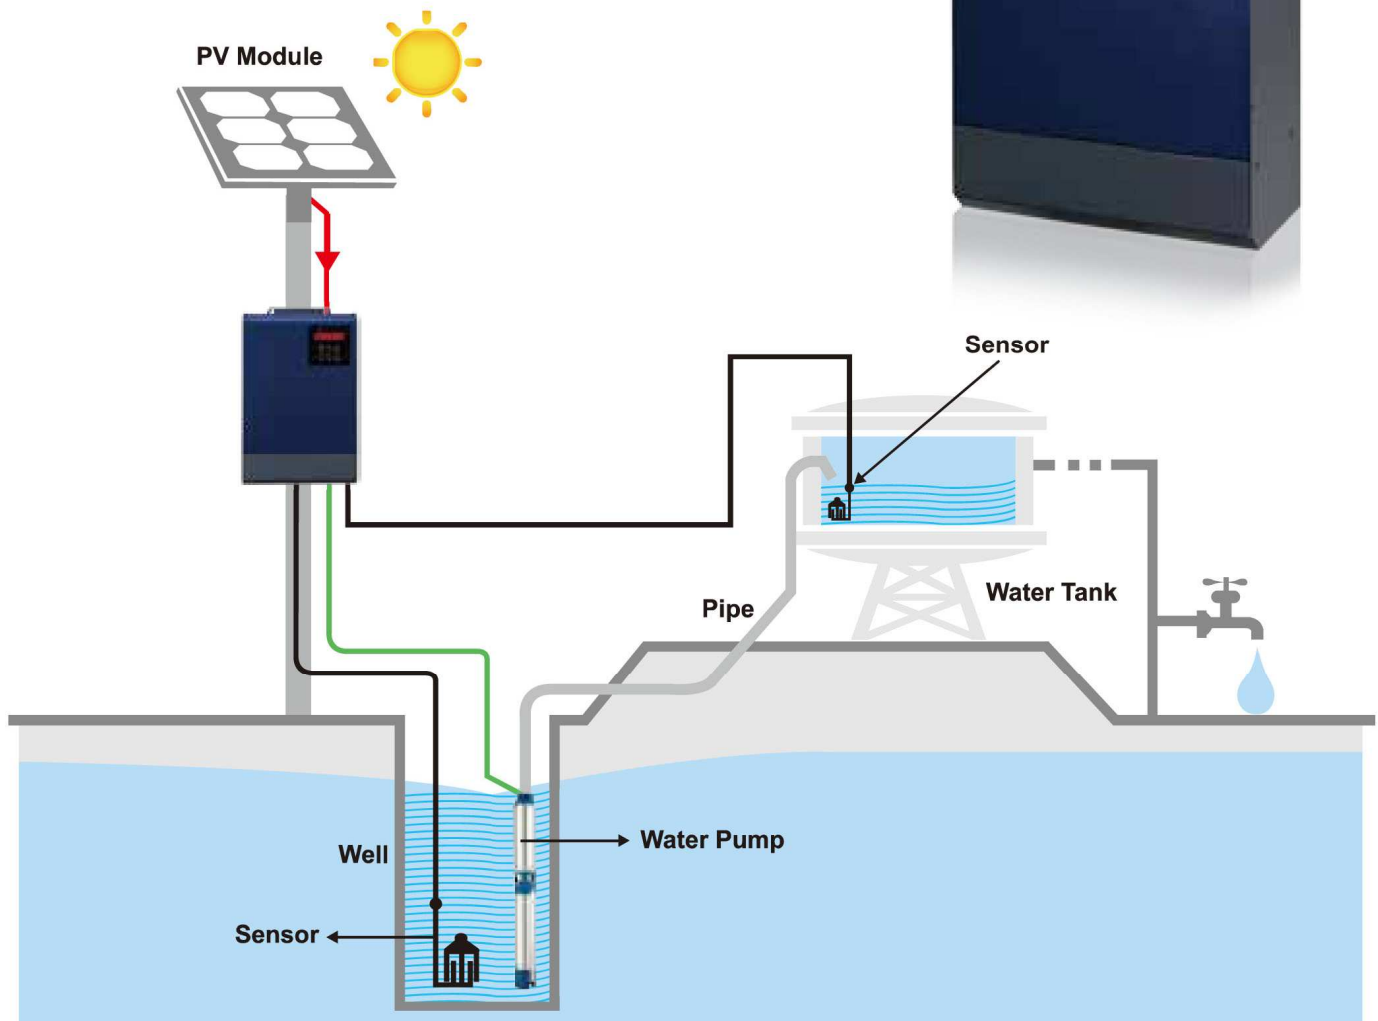

Solar Pump Inverter

- ▶ Built-in MPPT solar charger
- ▶ Supports three-phase asynchronous motor
- ▶ Built-in full protection and self-diagnosis
- ▶ Soft start function prevents water hammer effect and extends system lifecycle
- ▶ Comprehensive LEDs and display screen for real-time system status
- ▶ Remote monitoring through RS-485

Energy Flow GmbH

Germany: 4 Friedrichstraße,
45128 Essen, NRW
Bulgaria: 12 Gen. Skobelev Str.,
6100 Kazanlak, Stara Zagora

GSMs: Martin Zhelev +359 885 74 44 50
Stoyan Zhelev +359 887 26 28 27
Volen Makedonski +359 899 10 99 69
Fax: +359 431 6 44 28
e-mail: energyflow.org@gmail.com
website: www.energy-flow.org
www.ef-panles.com

Inverter Selection Guide

MODEL	2.2KW	7.5KW	11KW
PHASE	3-phase in / 3-phase out		
MAXIMUM PV ARRAY POWER	3500 W	12000 W	17600 W
RATED OUTPUT POWER	2200 W	7500 W	11000 W
PV INPUT (DC)			
Maximum DC Voltage	800 VDC		
Start-up Voltage	350 VDC		
MPPT Voltage Range	500 ~ 600 VDC		
Number of MPP Trackers	1		
OUTPUT			
Nominal Voltage	3 x 380/400/415/440 VAC		
Efficiency	> 97%		
Output Current	5.1 A	17 A	26 A
Motor Type	Three-phase asynchronous motor		
Frequency Precision	±0.2%		
PROTECTION			
Full Protection	Over-voltage, under-voltage, over-current, surge, over-temperature, short circuit protection		
PHYSICAL			
Dimension, D x W x H (mm)	110x230x342		
Net Weight (kgs)	5.5	6	6.5
Type of Mechanical Protection	IP20		
INTERFACE			
Communication Port	RS-232/RS-485		
ENVIRONMENT			
Humidity	< 95% RH (No condensing)		
Operating Temperature	-20°C~45°C at 100% full load, 46°C~60°C power derating		

Product specifications are subject to change without further notice

Energy Flow GmbH

Germany: 4 Friedrichstraße,
45128 Essen, NRW
Bulgaria: 12 Gen. Skobelev Str.,
6100 Kazanlak, Stara Zagora

GSMs: Martin Zhelev +359 885 74 44 50
Stoyan Zhelev +359 887 26 28 27
Volen Makedonski +359 899 10 99 69
Fax: +359 431 6 44 28
e-mail: energyflow.org@gmail.com
website: www.energy-flow.org
www.ef-panles.com