


### Rolls AGM 12V Deep Cycle Sealed Maintenance Free AGM Battery



CUT OFF VOLTAGE V/CELL	15M	30M	1HR	2HR	3HR	5HR	8HR	10HR	20HR
10.5V	261	167	103	55.1	40.8	28.8	19.6	16.2	10.0

RESERVE CAPACITY		CCA	
@25AMPS	@75 AMPS	CCA@0°C	CCA@-18°C
400 Mins.	100 Mins.	1500	1300

SPECIFICATIONS		
Nominal Voltage	12 Volt	
Rated Capacity (20 hour rate)	200 Ah	
Dimensions	Total Height (including terminals)	219mm
	Height	214mm
	Length	530mm
	Width	209mm
Weight	56.0 Kg	

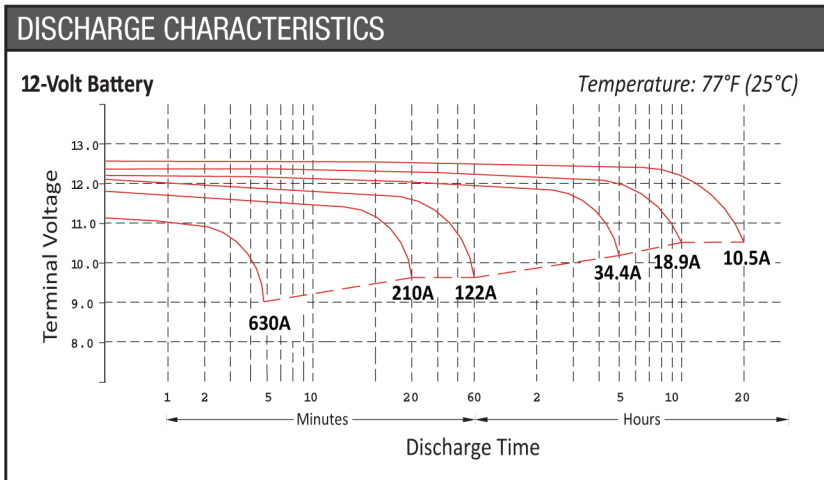

CHARACTERISTICS		
Capacity 77°F (25°C)	100 Hour Rate	220 Ah
	20 Hour Rate	200 Ah
	10 Hour Rate	162 Ah
Internal Resistance	Full charged Battery 77°F (25°C)	4mΩ
Capacity Affected by Temperature (20hr rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
Self Discharge 77°F (25°C)	5°F (-15°C)	65%
	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
Max Discharge 77°F (25°C)	Capacity after 12 month storage	64%
	2000A (5s)	
Terminal	Standard	F-M8
Charging (Constant Voltage)	Cycle	14.6 to 14.8V DC/unit Average at 25°C
	Float	13.6 to 13.8V DC/unit Average at 25°C

